




手动浆液阀

一、手动刀形闸阀（浆液阀）外形尺寸图：

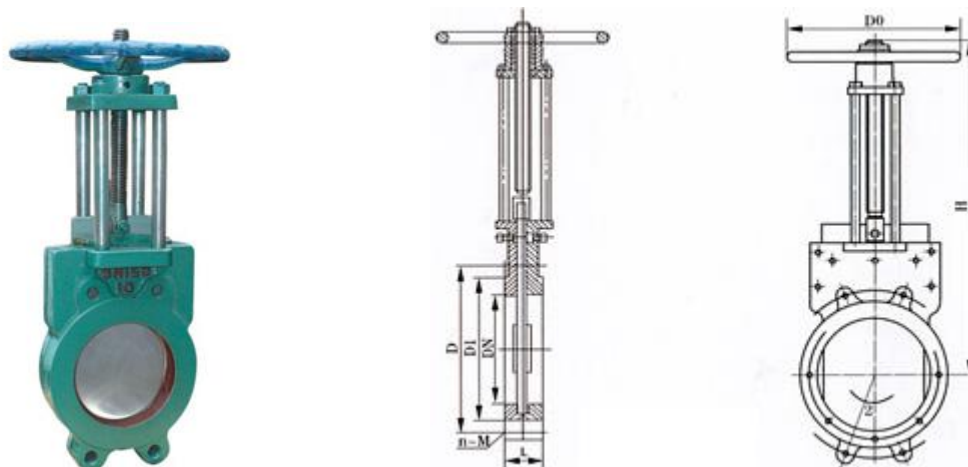

手动浆液阀

二、手动刀形闸阀（浆液阀）主要性能规范 Chief Property And Specification

公称压力 (MPa) Nominal Pressure	壳体 (MPa) Shell	密封 (MPa) Seal	工作温度 Working Temperature	适用介质 Suitable
0.6	0.9	0.66	≤80°C	纸浆、煤浆、灰、灰渣、水 Admixture Of Duff and Water、Water
1.0	1.5	1.8	≤80°C	

三、手动刀形闸阀（浆液阀）主要外型及连接尺寸 Main External And Connecting Dimensions (mm)

公称通径 DN	L		D	D1	Do	H	n-M
	PN6	PN10					
50	48	48	125	100	180	295	4- M 16
65	48	48	145	120	180	305	4- M 16
80	50	50	160	135	220	330	8- M 16
100	50	50	180	155	220	380	8- M 16
125	50	50	210	185	240	415	8- M 16
150	60	60	240	210	280	490	8- M 20
200	60	60	295	265	280	550	8- M 20
250	70	70	350	320	360	693	12- M 20
300	80	80	400	368	400	796	12- M 20
350	80	80	460	428	400	895	16- M 20
400	90	90	515	482	500	1004	16- M 22
450	90	90	565	532	500	1110	20- M 22
500	90	90	620	585	600	1210	20- M 22
600	140	140	725	685	700	1460	20- M 27
700	140	140	840	800	800	1680	24- M 27
800	190	190	950	905	800	1910	24- M 30
900	203	203	1050	1005	800	2130	28- M 30
1000	216	216	1160	1115	800	2350	28- M 3
1200	254	48	1380	1325	800	2650	32- M 30